

[Redacted text]

"1+" or "3"

Notification No.: 1008

Test Report No.:

**28240344 001**

Order No.:


**93356030**

Page 1 / 3

Client:

**JIANGSU ZHONGTIAN TECHNOLOGY CO., LTD.**

No. 1 Zhongtian Road, Wuxi Town, Deyang County, 226402, Jiangsu Province, China

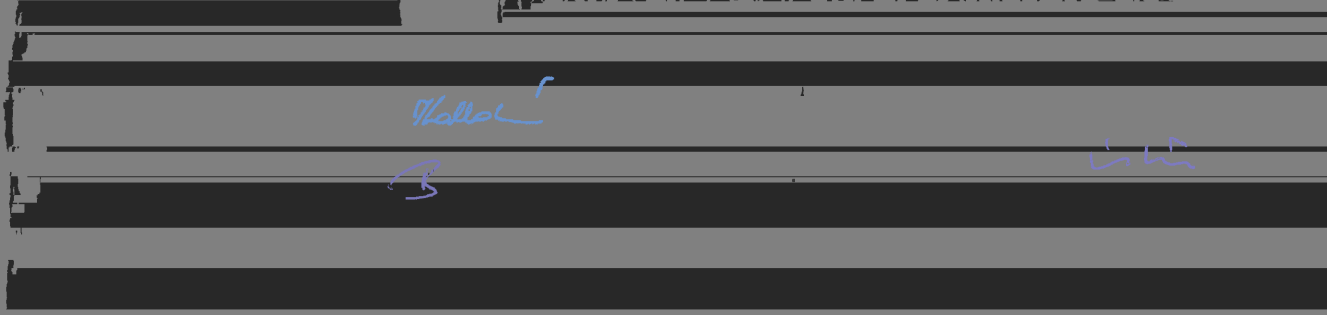


Harmonised standard: EN 50575:2014 + A1:2016

Classification standard: EN 13501-6:2014

Throughout this report a comma is used as the decimal separator.

Abbreviations: ok / P = passed  
fail / F = failed

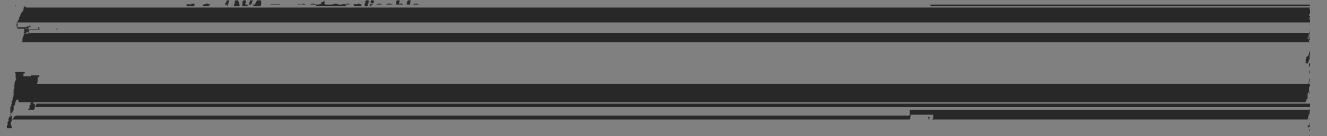

[www.tuv.hu](http://www.tuv.hu)

EN 60332-1-2

Clause	Requirement + Test	Result - Remark	Verdict
<b>ZTT GJFJV-4F 7.0mm (ZTT 0774)</b>			
<b>5</b>	<b>Procedure</b>		
	Sample length (600 ± 25 mm).....	615	P
	Approx. outer diameter (mm).....	7,0	
	Flame application time (s).....	60	P
<b>6</b>	<b>Evaluation of test results</b>		
	Not damaged area from lower edge of the top support (min. 50 mm).....	337	P
	Damaged area from lower edge of the top support	495	D

Test Type: **Test for vertical flame propagation for a single insulated wire or cable  
1 kW pre-mixed flame**

Standard: **EN 50575:2014 + A1:2016 EN 13501-6:2014**

EN 60332-1-2:2004 + A1:2015, EN 60332-1-1:2004 + A1:2015

No. of samples: 1

Ambient temperature: 26,5 °C

Date of test: 2017.08.07.

Classification according to EN 13501-6: **E<sub>ca</sub>**

**Photo documentation**



Before test

After test

**Measuring equipment list**

Device	Manufacturer	Type	Identification No.	Next calibration
Measuring tape	Stabila	DM 30M	502500	2019.03.31
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]

-END OF TEST REPORT-